

LIGHTSTREAMS

MLS3-WDI SERIES

WALL MOUNT DIRECT/INDIRECT

Architectural Linear LED Illuminating System | LIGHTSTREAMS 3





Features

- Wall mounted dual direction illumination.
- Direct downlighting and indirect uplighting for wall grazing and general illumination.
- Extruded aluminum housing for perfectly straight lines of light.
- Narrow 3-inch wide profile.
- Linear lengths; 2-ft. and above in increments of one-inch.
- Custom formulated high diffusion extruded acrylic lens.
- Non-glare matte-white polyester powder coating finish.
- Wall mounting system provides a half-inch standoff.
- Cataloged standard or custom set lumens-per-foot performances.
- 80 CRI standard. 90 CRI available.
- Dimming down to 1% on 0-10V controls.
- Fixture lumens per watt ratios up to 101.
- Lighting controls and sensors.
- Standard and custom corners
- American Made.



Cross Section (actual size)

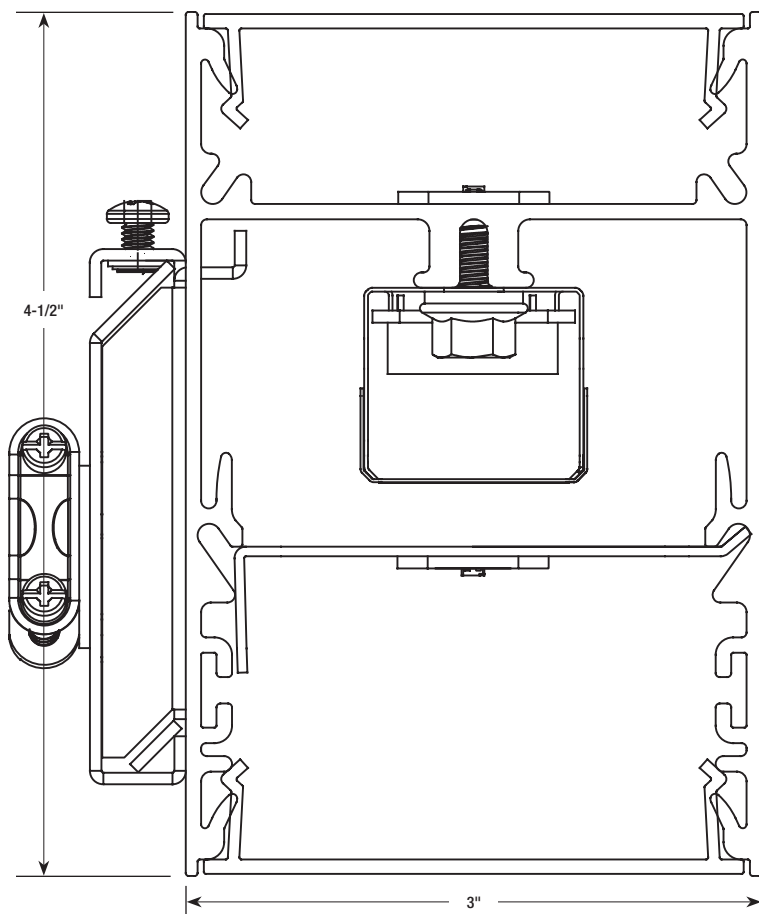

Performance

Based on 4Ft. Module, 3500K,
80 CRI, HTA diffuser

Multiplier for other Color Temp (K)

3000K	97%	4000K	102%
3500K	100%	5000K	103%

Direct Lumens Per Ft	Indirect Lumens Per Ft	Direct/ Indirect %	Delivered Lumens	System Watts (W)	Lumens Per Watt (LPW)
400	400	50/50	3200	26.1	122.6
	500	45/55	3600	30.9	116.5
	625	40/60	4100	35.2	116.5
	825	35/65	4900	43.3	113.2
	950	30/70	5400	47.8	113.0
500	1075	30/70	5452	53.4	102.1
	400	55/45	3600	30.9	116.5
	500	50/50	4000	32.8	122.0
	625	45/55	4500	38.5	116.9
	825	40/60	5300	46.6	113.7
625	950	35/65	5800	51.1	113.5
	1075	30/70	5852	56.7	103.2
	400	60/40	4100	35.2	116.5
	500	55/45	4500	38.5	116.9
	625	50/50	5000	41.9	119.3
825	825	45/55	5800	50.9	113.9
	950	40/60	6300	55.4	113.7
	1075	35/65	6352	61.0	104.1
	400	70/30	4900	43.3	113.2
	500	65/35	5300	46.6	113.7
950	625	60/40	5800	50.9	113.9
	825	50/50	6600	57.7	114.4
	950	45/55	7100	63.5	111.8
	1075	45/55	7152	69.1	103.5
	400	70/30	5400	47.8	113.0
1075	500	65/35	5800	51.1	113.5
	625	60/40	6300	55.4	113.7
	825	55/45	7100	63.5	111.8
	950	50/50	7600	68.1	111.6
	1075	45/55	7652	73.6	104.0
	400	75/25	5900	53.4	110.5
	500	70/30	6300	56.7	111.1
	625	65/35	6800	61.0	111.5
	825	60/40	7600	69.1	110.0
	950	55/45	8100	73.6	110.1
	1075	50/50	8600	78.6	109.4

Actual performance may differ by +/- 5% when operating between 120V-277V +/- 10%.
Consult Factory for 90 CRI performances.



fixture type:

job information:

MLS3-WDI Series | LIGHTSTREAMS 3

Architectural Linear LED Illuminating System | Wall Mount Direct/Indirect

Ex: MLS3-WDI-144-825-950-35K-HTA-1%-2C-U-EM12-S5

											Options		
MLS3	WDI												
Series	Mounting	Module or Row Length	Lumens/Ft Direct	Lumens/Ft Indirect	Color Temp	Diffuser	Driver	Circuiting	Voltage	Standby Modules*	Lighting Controls	Custom Hanging Points	Custom Paint Colors
MLS3 LightStreams 3	WDI Wall Mount Direct/Indirect	48 48" Length 96 96" Length 144 144" Length Custom or Row Length. 24" and above in 1" increments. Ex. in inches: 82, 384, etc.	400 500 625 825 950 1075 Custom Lumen Packages. Lumen Packages with ASO diffuser. Contact Factory.	400 500 625 825 950 1075 Custom Lumen Packages. Lumen Packages with ASO diffuser. Contact Factory.	30K 35K 40K 50K Upon Request 927K 930K 935K 940K	HTA High Transmission Acrylic ASO Acrylic Smooth Opal (Performance is reduced with this diffuser)	1% 0-10V 1% Dimming SR Sensor Ready (Required for Certain Controls, Contact Factory) LDE1 Lutron Hi-Lume LDE5 Lutron 5-Series As Specified	1C Single Circuit 2C Dual Circuit Direct/Indirect	U Uni 120V-277V 1 120V 7 277V X As Specified	EM5 EM7 EM10 EM12 No Option	S1 Philips EasySense S2 Magnum M9 (Dali) S5 Enlighted (C2-D2) O8 Sensor Switch (SFR7) O10 WattStopper (FS355) No Option	As Specified	As Specified

*Available in modules of 4-ft. and longer.

Housings

Extruded aluminum profile in a 0.080-inch wall thickness.

Maximum length of each linear component is 12-ft.

14GA steel ends are provided where needed at row termini.

A one-piece 14GA galvanized steel joiner/aligner bracket is provided for each joint between housings.

Internal cold-rolled steel components.

Standard or custom mounting points are provided along the housing side.

Housing easily mounts to a unique wall hanging system.

A custom formulated non-glare matte-white polyester powder coating provides an extremely durable and long-lasting finish.

Custom color finishes on request.

Diffusers

Seamless fit diffusers. Flawless and consistent end-to-end fit.

Standard diffuser: extruded from custom formulated high transmission white acrylic material. Allows maximum light transmission while eliminating pixilation and hot spots.

Optional diffuser: extruded from acrylic smooth opal material. Offers a more esthetically white appearance. Note: reduces performance by up to 25%.

Smooth finish on both diffusers compliments the architectural elements.

LED Modules

High performance linear configured LED module boards.

Each board consists of multiple mid-power, high efficacy LEDs in a precise layout eliminating the need for supplemental heat sinking.

The boards produce an even and diffuse light which maximizes optical efficiency.

Compatible with the dimming performance of the LED driver.

Color temperatures available 80 CRI: 3000K, 3500K and 4000K. Upon request: 5000K.

Color temperatures available 90 CRI: 2700K, 3000K, 3500K and 4000K.

LED Drivers

Factory programmable constant current LED power supply.

Multiple standard drive current outputs (factory set by Mercury) are cataloged with their corresponding lumens-per-foot offering. Upon request, custom drive current outputs and lumens-per-foot options are available.

Note: Certain cataloged lumens-per-foot offerings may be provided with a non-programmable constant current LED power supply at Mercury's discretion. Contact factory if critical.

Universal voltage input, 120V-277V, 50HZ-60HZ.

Specification grade dimming down to 1% on 0-10V dimming controls.

Sensor ready (SR) drivers compatible with most lighting controls are optional. Consult factory.

Lutron drivers available: LDE1 and LDE5 series.

Standby Lighting Options

Self contained module, 7W, 10W or 12W as specified. Battery backup upon loss of power. Available in modules of 4-ft. and longer.

Integral Lighting Controls

Various lighting controls and sensors are optional. Consult factory.

Corners

Standard 90-degree corners for inside or outside turns.

Custom angled corners.

Installations

Designed to be wall mounted with the half-inch off-set wall mounting system.

Labor saving feature allows installation without disassembling of luminaire.

May be directly mounted to wall.

Lengths of 12-ft. and less to use one housing with two ends pre-installed.

Lengths over 12-ft. will be engineered to job requirements using multiple housings with one end pre-installed at each row end.

Lengths over 12-ft. will include appropriate job required quick-connect plug-thru wire harnesses and housing joiners.

Certificate of Safety Compliance and Listings

Luminaire: UL and CUL listed 1598 and bears their label. Suitable for damp locations.

Warranty

5-year limited warranty is standard. Special 10-year warranty available on a job-to-job basis. Complete LED warranty terms available at www.mercltg.com.

Actual performance may differ as a result of end-user environment and application.

Most LED luminaires are suitable to operate in ambient temperatures from -20C (-4F) to 25C (77F).

The following exclusions apply: Luminaires with optional standby lighting option, integral lighting controls options, or wireless control options. Consult factory.

LM-79 testing was measured under a controlled 25C (77F) ambient operating temperature.



MLS3-WDI Series | LIGHTSTREAMS 3

Architectural Linear LED Illuminating System | Wall Mount Direct/Indirect

Dimensional Data

